

# R1932i

## ELECTRIC SCISSOR LIFT

SCISSOR LIFT



### KEY SPECS

**Platform Height**  
19-ft / 5.8-m

**Platform Capacity**  
507-lb / 230-kg

**Number of Occupants**  
1

**Stowed Drive Speed**  
2.1 mph / 3.4 km/h

### KEY FEATURES

- Indoor-only option is one of the lightest 19-ft scissor in its category.
- Active pothole protection provides increased ground clearance to tackle demanding terrain.
- Utilizes fewer parts with an improved battery charger for greater serviceability.
- Equipped with an all-steel platform and component doors with thicker rubber tires for added durability.

### ACCESSORIES & OPTIONS

- 4 x 6V AGM Batteries, 220 ah
- 900W Inverter
- Anti-Vandalism PKG
- CAN-Enabled Charger
- ClearSky™
- Coiled Platform Control Box Cable
- Drive Motor Covers
- Dual Flashing Amber Beacons - LED
- Eagle Performance Charger
- Flashing Amber Beacon - LED
- JLG® Mobile Control
- MDI (Ground)
- Panel Carrier
- Pipe Racks
- QuickFold Rails
- SkySense® Enhanced Detection System
- USB Charger & Phone Holder
- White Noise Alarm

### STANDARD SPECIFICATIONS

#### Performance Indoor-Only

|                                |                      |
|--------------------------------|----------------------|
| Platform Height (Elevated)     | 19-ft / 5.8-m        |
| Platform Capacity              | 507-lb / 230-kg      |
| Capacity on Platform Extension | 265-lb / 120-kg      |
| Number of Occupants            | 1                    |
| Lift / Lower Time (No Load)    | 20/27 seconds        |
| Lift / Lower Time (Rated Load) | 25/26 seconds        |
| Maximum Drive Height           | Fully Elevated       |
| Weight*                        | 2,725-lb / 1,236-kg  |
| Max. Ground Bearing Pressure   | 103 psi / 7.2 kg/cm² |
| Drive Speed (Lowered)          | 2.1 mph / 3.4 km/h   |
| Drive Speed (Raised)           | 0.5 mph / 0.8 km/h   |
| Gradeability                   | 25%                  |
| Max Tilt Rating (Side-to-Side) | 2.75 Degrees         |
| Max Tilt Rating (Fore and Aft) | 2.75 Degrees         |
| Turning Radius (Inside)        | Zero                 |
| Turning Radius (Outside)       | 66-in / 1.68-m       |

\*Certain options or country standards increase weight

#### Power

|           |                       |
|-----------|-----------------------|
| Batteries | 4 x 6V 220 amp-hr     |
| Charger   | 27 Amp                |
| Drive     | Hydraulic Front Wheel |

#### Tires

|          |                            |
|----------|----------------------------|
| Standard | 12.7 x 4-in / 323 x 100-mm |
|----------|----------------------------|

#### Brakes

Multi-Disc Friction

#### Hydraulic System

|          |                         |
|----------|-------------------------|
| Capacity | 4 gal / 15 L            |
| Pump     | Fixed Displacement Gear |

### STANDARD FEATURES

- 27 amp Multi-Function Universal Charger
- AC Receptacle in Platform
- Active Pothole Protection System
- All Motion Alarm
- Analyzer Port for Diagnostics
- Battery Condition Indicator
- Diamond Tread Steel Deck
- Dynamic Braking
- Foot-Actuated Deck Extension
- Fork Lift Pockets
- Greaseless Kingpin Joints
- Horn
- Hourmeter
- Lanyard Attach Points
- Lifting and Tie Down Points
- Load Sensing System
- Lubrication Free Scissor Arm Bushings
- Manual Descent Cable
- Movable, Removable Platform Control
- Nickel Plated Pins
- Proportional Controls
- Removable Ladder
- Scissor Maintenance Prop
- Self-Closing Gate
- Steel Swing-Out Doors
- Tilt Alarm and Light
- Variable Tilt Visual Zone Indicator

# R1932i



ELECTRIC SCISSOR LIFT

SCISSOR LIFT



## DIMENSIONS

All dimensions are approximate

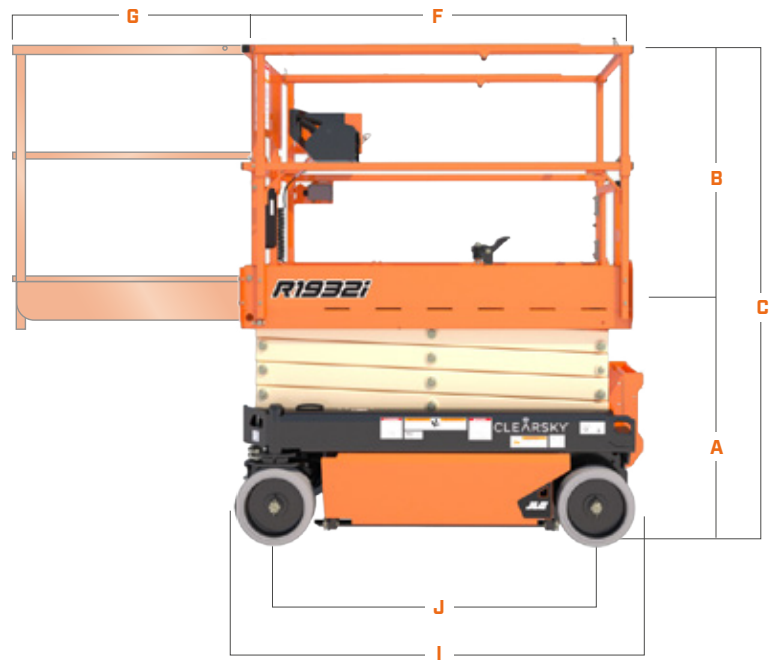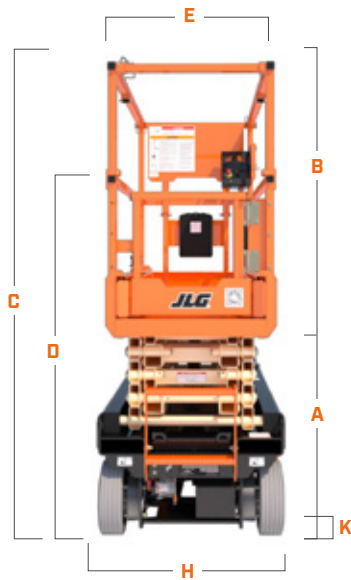

|                                   |                  |
|-----------------------------------|------------------|
| A. Platform Height (Lowered)      | 38.6-in / 1.0-m  |
| B. Platform Railing Height        | 43.3-in / 1.10-m |
| C. Machine Height (Rails Raised)  | 82.8-in / 2.1-m  |
| D. Machine Height (Rails Lowered) | 64.3-in / 1.63-m |
| E. Platform Width                 | 25.4-in / .64-m  |
| F. Platform Length                | 62.7-in / 1.59-m |
| G. Platform Extension             | 36-in / 91-cm    |

|                     |                 |
|---------------------|-----------------|
| H. Machine Width    | 32-in / 81-cm   |
| I. Machine Length   | 68.7-in / 1.7-m |
| J. Wheelbase        | 53-in / 1.3-m   |
| K. Ground Clearance | 2.8-in / 7-cm   |



We provide coverage for one (1) full year, and cover all specified major structural components for five (5) years. Due to continuous product improvements, we reserve the right to make specification and/or equipment changes without prior notification. This machine meets or exceeds applicable ANSI and CSA requirements based on machine configuration as originally manufactured for intended applications. Please reference the serial number plate on the machine for additional information.



**JLG INDUSTRIES, INC.**  
Toll-free US 877-JLG-LIFT  
**JLG.com**

An Oshkosh Corporation Company